
ORIGINAL ARTICLE

Response of Crop yield to Moisture distribution Uniformity of Sprinklers

Devdatta V. Pandit*¹, Derrick M. Denis²

1. Dept. Of SWCE, SSCAE, Mirajgaon, Dist. Ahmednagar, Maharashtra, India

2. VIAET, SHUATS, Allahabad- 211007 (U.P.) India

Corresponding Author* ¹ E-mail: (devdatta09@gmail.com)

ABSTRACT

Water scarcity is the common problem for agriculture experienced all over the world. To overcome this problem, efficient use of available water is necessary. Many methods are used for applying irrigation to the field crop. Irrigating with sprinkler system is most efficient method adopted by water users, which has proved to be most beneficial for the crops. The uniformity with which an irrigation system applies water has an effect on the efficiency of the system. The uniformity of an irrigation system needs to be high to ensure that the majority of the crop receives an adequate amount of water. This study was carried out to evaluate the effect of Low sprinkling distribution uniformity on the yield of pea. This study revealed that low distribution uniformity will result in low yield. It also reveals that to maximize the yield of pea the depth of irrigation should be doubled when irrigating using sprinkler irrigation on daily basis.

Keywords: Sprinkler uniformity, pea yield.

Received 02.09.2017

Revised 15.12.2017

Accepted 18.02.2018

How to cite this article:

Devdatta V. Pandit, Derrick M. Denis. Response of Crop yield to Moisture distribution Uniformity of Sprinklers. Adv. Biores., Vol 9 [2] March 2018.145-150.

INTRODUCTION

Crop water requirement is an important aspect when irrigation for any crop is to be applied. It is important to know that, how much amount of water is needed by the particular crop at that particular crop growth stage. Crop water requirement is defined as, the depth of water needed to meet the water loss through evapotranspiration (ET_{crop}) of a disease-free crop, growing in large fields under non-restricting soil conditions including soil water and fertility and achieving full production potential under the given growing environment [2]. With the growing population rate, there is challenge to supply the needs of the people in terms of food security. Agriculture sector is always under intense pressure to produce sufficient amount of food grains to meet its growing demand. Higher crop yield can only be achieved, when crop water requirements are met with uniform application of water in field. Various irrigation method for water application are used by the farmers to achieved the expected yield of crop. With increasing demand on water resources, irrigation efficiency has become an important issue for the farmers and the water managers' worldwide. Sprinkler irrigation represents the broad class of pressurized irrigation methods. The usual goal of sprinkling is uniform watering for entire field. Application of water to the soil through sprinklers is based on the principle of no runoff. Sprinkler irrigation is becoming increasingly popular in India in regions of water scarcity where available water is insufficient to irrigate the command area by surface irrigation. In such regions, by adopting suitable cropping patterns consisting of crops having high water requirements like wheat and those having low water requirements like mustard and gram, much higher area can be brought under irrigation and farm income increased substantially by adopting sprinkler irrigation. Sprinklers are also being increasingly used for irrigating a high valued plantation crops like tea, coffee, cardamom and orchards. Irrigation systems evaluation is done based on irrigation efficiency indices such as uniformity coefficient, distribution uniformity and application efficiency. Determination of irrigation efficiency indices can help water users in planning, designing and operating strategies of irrigation system. Uniformity of soil

moisture under sprinkler irrigation is important for plant quality; however, sprinkler systems are typically gauged by the uniformity of application above the crop canopy [1]. Literature states that, various studies have been carried out on water distribution and irrigation system effects on crops yield. To understand the crop yield under sprinkler irrigation it is necessary to understand how the crop will respond under very low distribution uniformity obtained using single overhead sprinkler. The main objective to irrigate using sprinkler irrigation is to obtain uniform depth of irrigation [3,4]. This study was carried out to understand the actual response of yield of pea crop to water application sprinklers.

MATERIALS AND METHODS

Field experiment was conducted at Irrigation Research Station of Allahabad Agricultural Institute – Deemed University, Allahabad, U.P, India. (25° 27° N, 81° 44° E 98 m above mean sea level) during the winter crop growing period (December – April) in order to examine the effect of low distribution uniformity of set sprinkler irrigation on crop yield of Pea. The Allahabad district is located in the north part of India and south-east part of Uttar Pradesh (U.P) state. It has an area of 5246 sq km. The Allahabad district receives an annual rainfall of 600 to 800mm. Ganga and Yamuna, which originates respectively, from Himalaya Glacier, are the two major rivers of the Allahabad District. The climate in this part of country has been classified as semi-arid with cold winter and hot summer. The soil of the experimental field was fertile clay loam (35.5% sand, 25.8% silt and 38.6% clay) with average bulk density of 1.31 g/cm³. The plant available soil moisture was 136 mm/m and 0.28. The experiment was conducted in five replications for Pea. The area of each experimental plot was 100m² (10m x 10m). Pea (ARKLE) was sown at a row to row spacing of 25 cm. Before sowing the experimental field was properly ploughed, well pulverized and leveled to provide good tilth.

Crop was irrigated daily according to the daily crop water requirement using sprinklers. The irrigation system was designed and installed to meet the objectives of the proposed research work. The sprinklers mounted on 1 m high riser were installed at the corner of each plots. The flow rate for the sprinkler used was 0.3 l/s at the pressure of 2.5 kg/cm². The irrigation water was directly pumped from the concrete water tank. Screen filter was installed on the main line to minimize sprinkler blockage. Standard cultural practices were adopted during the crop growing seasons.

CROP WATER REQUIREMENT

The crop water requirement (ET_{crop}) for the crop grown was calculated by the following method:

$$ET_{crop} = K_c ET_p \quad (1)$$

Where,

K_c = crop coefficient

ET_p = reference/potential evapotranspiration, mm/day

ET_{crop} = crop water requirement mm/day

The modified penman's model [2] was used to estimate the potential / reference evapotranspiration (ET_p). The detail of the model is given as below:

$$ET_p = C [WR_n + (1 - W)F(u) (e_a - e_d)], \text{ mm/day} \quad (2)$$

Where,

ET_p = reference/potential evapotranspiration, mm/day

W = temperature related weighting factor

R_n = net radiation in equivalent evaporation mm/day

F(u) = wind related function

(e_a - e_d) = difference between the saturation vapour pressure at mean air temperature and mean actual vapour pressure of the air, mbar.

C = adjustment factor to compensate day and night weather condition.

The components of the modified penman's model were estimated as:

- 1) Actual vapour pressure, e_d was completed by following formula:

$$R.H. = \frac{e_d}{e_a} \times 100 \quad (3)$$

Where,

R.H = Relative humidity, % (obtained from meteorological office)

e_a = Saturated vapour pressure [2]

- 2) Wind velocity at 2 m height was contorted in respective 5 m height with the help of correction factor and F(u) was calculated by the following formula:

$$F(u) = 0.27 \left(1 + \frac{u}{100}\right) \quad (4)$$

Where,

$U = 24$ hrs wind speed at 2m height, km/day

3) Temperature related weighing factor W and $(1 - W)$ were obtained from standard Tables for respective air temperature [2]

4) Net radiation (R_n) was calculated with the help of the series of formulae (FAO, 1977)

$$R_n = R_{ns} - R_{ni} \quad (5)$$

Where,

R_n = net radiation in equivalent evaporation, mm/day

R_{ns} = net short wave radiation, mm/day

R_{ni} = net long wave radiation, mm/day

$R_s = (0.25 + 0.5 n/N) R_a$

$R_{ns} = (1 - \alpha) R_s$

Where,

n = Actual sunshine hour

N = Maximum sunshine obtained from Table with respect to latitude and time of year, hour [2]

R_a = Extra terrestrial radiation obtained by table on the basis of latitude and time of year, mm/day [2]

R_s = Solar radiation in equivalent evaporation, mm/day

α = Reflectivity factor, depends upon crop surface, leaf area index and vegetation, fraction [2]

$R_{ni} = f(T) f(e_d) f(n/N)$

Where,

$F(T)$ = function of temperature, obtained Table against known mean air temperature, [2]

$F(e_d)$ = function of saturated vapour pressure, obtained from table [2]

$F(n/N)$ = function of actual sunshine hour to maximum sunshine hour, obtained from table [2]

IRRIGATION REQUIREMENTS

Following field water balance model was employed to complete the net irrigation requirement.

$$L_n = Et_{crop} - (P_e + G_w + W_b) \quad (6)$$

Where,

L_n = net irrigation requirement

Et_{crop} = crop water requirement

P_e = effective rainfall

G_w = Ground water contribution

W_b = Stored soil water at the beginning of each period

All variables in the above equation are expressed in terms of depth of water (mm)

Leaching requirement for crop grown was estimated by the following equation

$$LR = \frac{EC_w}{5EC_e - EC_w}$$

Where,

EC_w = electrical conductivity of the irrigation water, mm hos /cm

EC_e = electrical conductivity of the soil saturation extraction for a given crop appropriate to the tolerate degree of the yield reduction, mm hos /cm.

Distribution uniformity (DU)

In order to put a numerical value on the uniformity of application for sprinkler irrigation system and the yield of wheat Distribution uniformity DU (Merriam and Keller, 1978) was used. It is computed by:

$$DU = \frac{\text{Average low quarter depth of water recieved}}{\text{Average depth of water recieved}} \times 100 \quad (7)$$

Uniformity Coefficient (UC)

The Christiansen Uniformity Coefficient was calculated using the relation:

$$CU = 100 - 0.63(100 - DU) \quad (8)$$

RESULT AND DISCUSSION

Yield response of pea under low distribution uniformity

The sprinkling droplet distribution pattern obtained by using single leg catch can data as shown in the figure 1 explains the variation between the depths of water in the study area. Since in actual field

conditions while irrigating pea this water is not confined in 2m x 2m boundary but the infiltration of the water is three-dimensional. The water when sprayed in the wetted area did not create poundings because special care was taken to check the flow of water from one division to another.

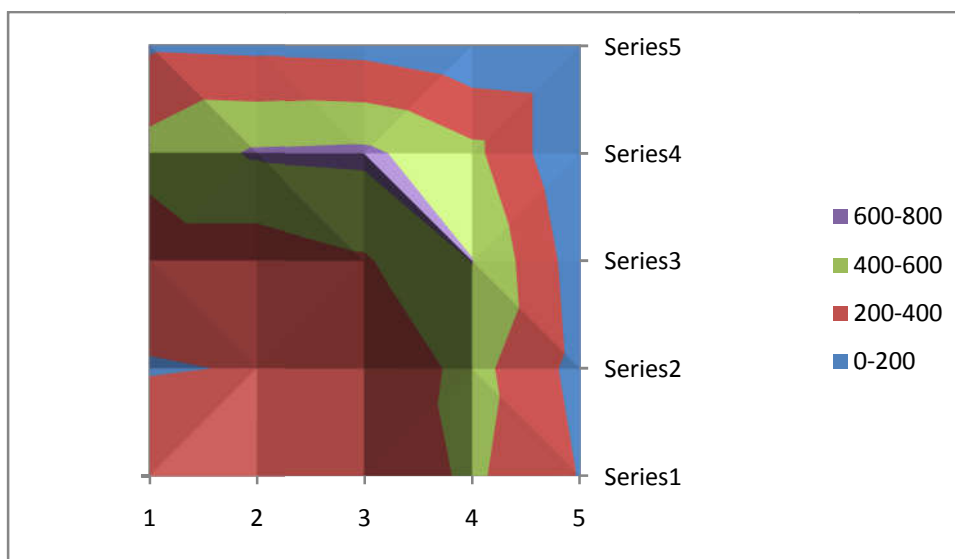


Fig.1 Sprinkling Distribution Uniformity

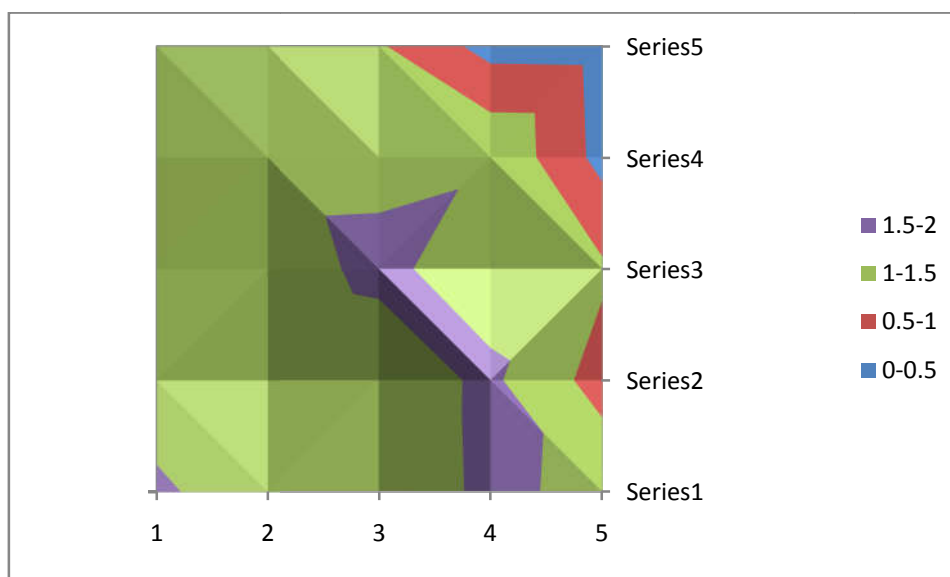


Fig.2 Pea Yield Distribution Uniformity

The water applied for Pea is shown in table 1. The data in the table has been put in the ascending order. From the table it can be seen that in spite of areas receiving no precipitated sprinkled water some yield is observed. At 0 mm precipitation the yield of pea is 0.3t/ha. This is due to the fact that the precipitated water moves horizontally into the soil.

Table 1. Precipitation depth in ascending order and their corresponding yield of Pea.

Depth of precipitation, mm.	Yield (Pea), t/ha.
642	1.39
623	1.40
605	1.28
472	1.59
472	1.36
454	1.46
435	1.58
378	1.60
340	1.54
283	1.38
283	1.30
246	1.36
246	1.24
208	1.16
208	1.23
189	1.40
189	1.38
170	1.23
151	1.18
132	0.80
132	1.05
95	1.08
38	0.32
0	0.34
0	0.30

Relationship between moisture profile and yield of Pea

The moisture distribution due to precipitation of water as shown in figure 1 is compared with figure 2. Figure 1 has been classified into four groups i.e. 0 mm – 200 mm, 200 mm – 400 mm, 400 mm – 600 mm and 600 mm – 800 mm. From both the figures it is seen that in the case of extreme water deficit the yield range between 0 – 0.5 t/ha whereas for the range of 200mm – 400mm the yield is ranging between 1 – 2 t/ha. This is due to the fact that at the outer wetting front of the wetted area the moisture is moving towards the outer area due to change in gradient. The maximum yield of 1.5 - 2 t/ha is observed nearer to the sprinkler in spite of that area having 200mm – 400mm, 400mm – 600mm wetting profile. When we compare this particular distribution with the yield it can be seen in figure 2 that the yield is most uniform in this area because of horizontal movement of soil moisture. A higher yield of 1.5 - 2 t/ha is seen in the center of the wetted area, which indicate most cordial condition for pea growth.

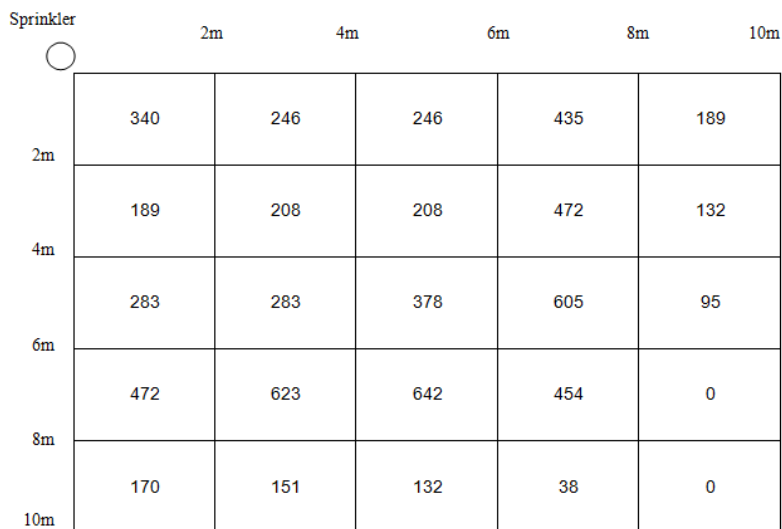


Fig. 3 Depth of precipitation during crop growing season (mm).

The relationship between depth of water and yield is shown in figure 4 it can be seen that as the depth of precipitation increases the yield response is parabolic. The maximum yield of 1.6t/ha was found to be at 378mm. From table 1 and figure 4 it can be observed that in order to get maximum yield of wheat using sprinkler irrigation the mean depth of water should be 378mm. Since the irrigation was done on daily basis the soil moisture status did not change also no precipitation (rainfall event) occurred during the entire crop-growing period.

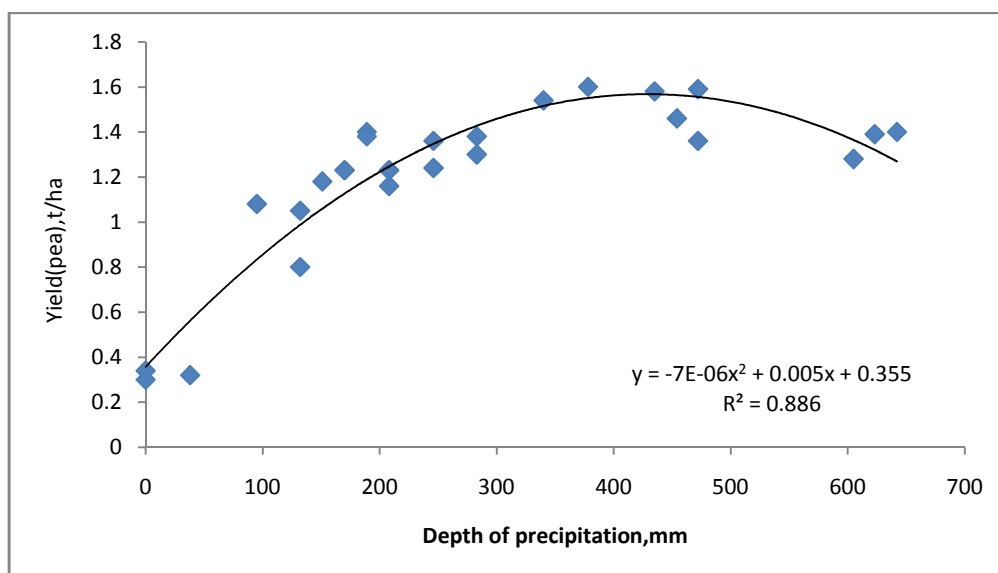


Fig. 4 Relationship between precipitation depth and yield of pea

CONCLUSION

Distribution uniformity of sprinkled water is a very important factor to be considered while irrigating the field using sprinklers. Single leg catch can data were used and also only a quarter of the wetted area was irrigated to understand how low distribution uniformity is affecting the yield of pea. The result revealed that the yield varies with the change in depth of irrigated water. The distribution uniformity of the yield of pea was found to be at 58.95% although irrigation was done using single sprinkler with low distribution uniformity of only 23.66%. Sprinkling Christiansen uniformity coefficient was observed to be 51.90% and pea yield uniformity coefficient was 74.13 % respectively. This phenomenon indicates that the water is having increased distribution uniformity in the soil resulting in higher yield distribution uniformity. The maximum and minimum yield of pea was found to be 1.60 t/ha and 0.30 t/ha at 378 mm and 0 mm respectively. The study reveals that low distribution uniformity will result in low yield. It also reveals that to maximize the yield of pea the depth of irrigation should be doubled when irrigating using sprinkler irrigation on daily basis. The real concern should be about how evenly the moisture is distributed above the soil i.e. in catch cans. Hence it is strongly recommended that studies should be conducted to understand the soil moisture uniformity and yield.

REFERENCES

1. Dukes, M.D., Haley, M.B., Hanks, S.A., (2006). Sprinkler Irrigation and Soil Moisture Uniformity, Paper presented at the 27th Annual International Irrigation Show San Antonio, TX.
2. Crop water requirements, FAO, Irrigation and Drainage Paper, (1977).
3. Christiansen, J.E. (1941) The uniformity of Water by sprinkler systems. Agricultural Engineering Vol. 22, no. 3 : pp. 89-92
4. Merriam J.L., Keller J. (1978). Farm Irrigation System Evaluation: A Guide for Management. Department of Agricultural and Irrigation Engineering, Utah State University, Logan.

Copyright: © 2018 Society of Education. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.